

國立臺灣科技大學

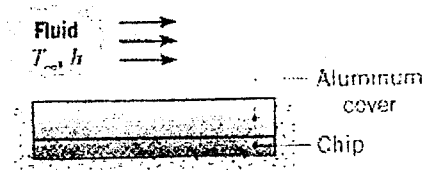
九十一學年度碩士班招生考試試題

系所組別：機械工程系丙組

科目：熱力學

每題二十分,總分一百分.

1. A 50 kg copper block initially at 100 °C ($C_p=0.39 \text{ kJ/kg K}$) is dropped into an insulated tank which contains 120 kg of water ($C_p=4.184 \text{ kJ/kg K}$) at 25 °C. Determine the final equilibrium temperature and the total entropy change for this process.
2. An insulated rigid tank is divided into two equal parts by a partition. Initially, one part contains 5 kg of nitrogen at 200 kPa and 60 °C, and the other part is evacuated. The partition is now removed, and the gas expands into the entire tank. Determine the final pressure and temperature in the tank.
3. A closed system initially contains steam at 300 kPa and 150 °C (state 1) with a volume of 1.2 m³, compressed by a process $pv^{1.3} = \text{constant}$ to 1.6 MPa (state 2), then cooled under constant volume to state 3, and then returns to state 1 by an isothermal process. Draw this cycle on a $p-v$ diagram, and determine (a) the temperature of state 2, and (b) the mass and volume of liquid water at state 3.
4. A refrigerator uses R134A as the working fluid and operates on an ideal vapor-compression refrigeration cycle between 0.14 and 0.7 MPa. If the mass flow rate of the refrigerant is 0.042 kg/s, determine (a) the rate of heat removal from the refrigerated space and the power input to the compressor, (b) the rate of heat rejection to the environment, and (c) the COP of the refrigerator.
5. A silicon chip is encapsulated such that, under steady-state conditions, all of the power it is transferred by convection to a fluid stream for which $h = 800 \text{ W/m}^2\text{-K}$ and $T_\infty = 35^\circ\text{C}$. The chip is separated from the fluid by a 2-mm-thick aluminum cover plate, and the contact resistance of the chip/aluminum interface is $0.5 \times 10^{-4} \text{ m}^2\text{-K/W}$. If the chip surface is 100 mm² and its maximum allowable temperature is 85 °C, what is the maximum allowable power dissipation in the chip?

Assume $k = 238 \text{ W/mK}$, For Aluminum

國立臺灣科技大學
九十一學年度碩士班招生考試試題

系所組別：機械工程系丙組
科目：熱力學

TABLE A-12

Saturated refrigerant-134a—Pressure table

Press., P/MPa	Temp., T _{sat} /°C	Specific volume, m ³ /kg		Internal energy, kJ/kg		Enthalpy, kJ/kg			Entropy, kJ/kg·K	
		Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Sat. vapor, s _g
0.06	-37.07	0.0007097	0.3100	3.41	206.12	3.46	221.27	224.72	0.0147	0.9520
0.08	-31.21	0.0007184	0.2366	10.41	209.46	10.47	217.92	228.39	0.0440	0.9447
0.10	-26.43	0.0007258	0.1917	16.22	212.18	16.29	215.06	231.35	0.0678	0.9395
0.12	-22.36	0.0007323	0.1614	21.23	214.50	21.32	212.54	233.86	0.0879	0.9354
0.14	-18.80	0.0007381	0.1395	25.66	216.52	25.77	210.27	236.04	0.1055	0.9322
0.16	-15.62	0.0007435	0.1229	29.66	218.32	29.78	208.18	237.97	0.1211	0.9295
0.18	-12.73	0.0007485	0.1098	33.31	219.94	33.45	206.26	239.71	0.1352	0.9273
0.20	-10.09	0.0007532	0.0993	36.69	221.43	36.84	204.46	241.30	0.1481	0.9253
0.24	-5.37	0.0007618	0.0834	42.77	224.07	42.95	201.14	244.09	0.1710	0.9222
0.28	-1.23	0.0007697	0.0719	48.18	226.38	48.39	198.13	246.52	0.1911	0.9197
0.32	2.48	0.0007770	0.0632	53.06	228.43	53.31	195.35	248.66	0.2089	0.9177
0.36	5.84	0.0007839	0.0564	57.54	230.28	57.82	192.76	250.58	0.2251	0.9160
0.4	8.93	0.0007904	0.0509	61.69	231.97	62.00	190.32	252.32	0.2399	0.9145
0.5	15.74	0.0008056	0.0409	70.93	235.64	71.33	184.74	256.07	0.2723	0.9117
0.6	21.58	0.0008196	0.0341	78.99	238.74	79.48	179.71	259.19	0.2999	0.9097
0.7	26.72	0.0008328	0.0292	86.19	241.42	86.78	175.07	261.85	0.3242	0.9080
0.8	31.33	0.0008454	0.0255	92.75	243.78	93.42	170.73	264.15	0.3459	0.9066
0.9	35.53	0.0008576	0.0226	98.79	245.88	99.56	166.62	266.18	0.3656	0.9054
1.0	39.39	0.0008695	0.0202	104.42	247.77	105.29	162.68	267.97	0.3838	0.9043
1.2	46.32	0.0008928	0.0166	114.69	251.03	115.76	155.23	270.99	0.4164	0.9023

R-134a

TABLE A-13

Superheated refrigerant-134a (Concluded)

T °C	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg·K	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg·K	v m ³ /kg	u kJ/kg	h kJ/kg	s kJ/kg·K
P = 0.50 MPa (T _{sat} = 15.74°C)				P = 0.60 MPa (T _{sat} = 21.58°C)				P = 0.70 MPa (T _{sat} = 26.72°C)				
Sat.	0.04086	253.64	256.07	0.9117	0.03408	238.74	259.19	0.9097	0.02918	241.42	261.85	0.9080
20	0.04188	239.40	260.34	0.9264	0.03581	246.41	267.89	0.9388	0.02979	244.51	265.37	0.9197
30	0.04416	248.20	270.28	0.9597	0.03774	255.45	278.09	0.9719	0.03157	253.83	275.93	0.9539
40	0.04633	256.99	280.16	0.9918	0.03958	264.48	288.23	1.0037	0.03324	263.08	286.35	0.9867
50	0.04842	265.83	290.04	1.0229	0.04134	273.54	298.35	1.0346	0.03482	272.31	296.69	1.0182
60	0.05043	274.73	299.95	1.0531	0.04304	282.66	308.48	1.0645	0.03634	281.57	307.01	1.0487
70	0.05240	283.72	309.92	1.0825	0.04469	291.86	318.67	1.0938	0.03781	290.88	317.35	1.0784
80	0.05432	292.80	319.96	1.1114	0.04631	301.14	328.93	1.1225	0.03924	300.27	327.74	1.1074
90	0.05620	302.00	330.10	1.1397	0.04790	310.53	339.27	1.1505	0.04064	309.74	338.19	1.1358
100	0.05805	311.31	340.33	1.1675	0.04946	320.03	349.70	1.1781	0.04201	319.31	348.71	1.1637
110	0.05988	320.74	350.68	1.1949	0.05099	329.64	360.24	1.2053	0.04335	328.98	359.33	1.1910
120	0.06168	330.30	361.14	1.2218	0.05251	339.38	370.88	1.2320	0.04468	338.76	370.04	1.2179
130	0.06347	339.98	371.72	1.2484	0.05402	349.23	381.64	1.2584	0.04599	348.66	380.86	1.2444
140	0.06524	349.79	382.42	1.2746	0.05550	359.21	392.52	1.2844	0.04729	358.68	391.79	1.2706
150					0.05698	369.32	403.51	1.3100	0.04857	368.82	402.82	1.2963
160												
P = 0.80 MPa (T _{sat} = 31.33°C)				P = 0.90 MPa (T _{sat} = 35.53°C)				P = 1.00 MPa (T _{sat} = 39.39°C)				
Sat.	0.02547	243.78	264.15	0.9066	0.02255	245.88	266.18	0.9054	0.02020	247.77	267.97	0.9043
40	0.02691	252.13	273.66	0.9374	0.02325	250.32	271.25	0.9217	0.02029	248.39	268.68	0.9066
50	0.02846	261.62	284.39	0.9711	0.02472	260.09	282.34	0.9566	0.02171	258.48	280.19	0.9428
60	0.02992	271.04	294.98	1.0034	0.02609	269.72	293.21	0.9897	0.02301	268.35	291.36	0.9768
70	0.03131	280.45	305.50	1.0345	0.02738	279.30	303.94	1.0214	0.02423	278.11	302.34	1.0093
80	0.03264	289.89	316.00	1.0647	0.02861	288.87	314.62	1.0521	0.02538	287.82	313.20	1.0405
90	0.03393	299.37	326.52	1.0940	0.02980	298.46	325.28	1.0819	0.02649	297.53	324.01	1.0707
100	0.03519	308.93	337.08	1.1227	0.03095	308.11	335.96	1.1109	0.02755	307.27	334.82	1.1000
110	0.03642	318.57	347.71	1.1508	0.03207	317.82	346.68	1.1392	0.02858	317.06	345.65	1.1286
120	0.03762	328.31	358.40	1.1784	0.03316	327.62	357.47	1.1670	0.02959	326.93	356.52	1.1567
130	0.03881	338.14	369.19	1.2055	0.03423	337.52	368.33	1.1943	0.03058	336.88	367.46	1.1841
140	0.03997	348.09	380.07	1.2321	0.03529	347.51	379.27	1.2211	0.03154	346.92	378.46	1.2111
150	0.04113	358.15	391.05	1.2584	0.03633	357.61	390.31	1.2475	0.03250	357.06	389.56	1.2376
160	0.04227	368.32	402.14	1.2843	0.03736	367.82	401.44	1.2735	0.03344	367.31	400.74	1.2638
170	0.04340	378.61	413.33	1.3098	0.03838	378.14	412.68	1.2992	0.03436	377.66	412.02	1.2895
180	0.04452	389.02	424.63	1.3351	0.03939	388.57	424.02	1.3245	0.03528	388.12	423.40	1.3149

R-134a

